



6911 Marlin Circle, La Palma, CA 90623
(714) 523-8700, Fax (714) 523-3220



BMW 88-95 R100GS 465 Series Single Shock supplement

Please read these instructions completely before starting!

1. Install O-ring over the step on the spacers as shown. Notice that on the upper mount (body end), one spacer is wider than the other. Install the shock with the wide spacer toward the motorcycle, so it spaces the shock away from the tire. Install the shock with one spacer inside and one outside the shock as shown, do this for both top and bottom mounts.

2. Mount the shock, referencing your authorized shop manual, noting the following important details: Make sure the rebound adjustment is at the bottom facing outward from the motorcycle and the pressure valve is facing to the rear. Tighten shock bolts to the proper torque specifications (refer to your manual).

Caution: The installed spring length must never be set shorter than 7.95".

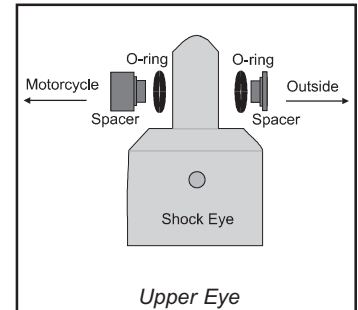

<http://www.progressivesuspension.com>



6911 Marlin Circle, La Palma, CA 90623
(714) 523-8700, Fax (714) 523-3220



BMW 88-95 R100GS 465 Series Single Shock supplement

Please read these instructions completely before starting!

1. Install O-ring over the step on the spacers as shown. Notice that on the upper mount (body end), one spacer is wider than the other. Install the shock with the wide spacer toward the motorcycle, so it spaces the shock away from the tire. Install the shock with one spacer inside and one outside the shock as shown, do this for both top and bottom mounts.

2. Mount the shock, referencing your authorized shop manual, noting the following important details: Make sure the rebound adjustment is at the bottom facing outward from the motorcycle and the pressure valve is facing to the rear. Tighten shock bolts to the proper torque specifications (refer to your manual).

Caution: The installed spring length must never be set shorter than 7.95".

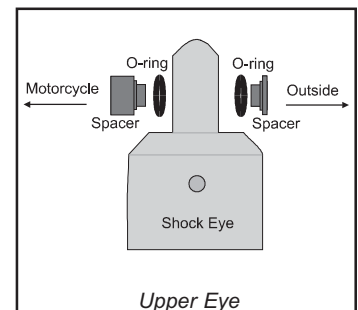

<http://www.progressivesuspension.com>